

Project:	Description:	Printed/Page
EW Zawidz-Raciaz	Działka ewidencyjna 156 obr. Osiek Piaseczny.	2014-02-02 14:30 / 1
	Emitter dzwieku: EW Osiek (156): - wysokość masztu: 60 m, - moc akustyczna: 106,0 dB (A), - współczynnik szorstkości gruntu G=0 (zasada przezorności, niezgodnie z PN-ISO 9613-2:2002 Akustyka).	Licensed user:
		NATURO Piotr Dmochowski
		ul. Owsiana 1A
		PL-81-020 Gdynia
		(+48) 501 552 536
		Piotr Dmochowski / piotr@naturo.info
	Punkty emisji równowaznego poziomu dzwieku: - H1: H15.	Calculated: 2014-02-02 14:30/2,8.579

DECIBEL - Main Result

Calculation: Zal. 3.2 Analiza akustyczna: EW Osiek (156) (zasada przezorności)

Noise calculation model:

ISO 9613-2 General

Wind speed:

13,0 m/s

Ground attenuation:

General, Ground factor: 0,0

Meteorological coefficient, C0:

0,0 dB

Type of demand in calculation:

1: WTG noise is compared to demand (DK, DE, SE, NL etc.)

Noise values in calculation:

All noise values are mean values (Lwa) (Normal)

Pure tones:

Pure and Impulse tone penalty are added to WTG source noise


Height above ground level, when no value in NSA object:

4,0 m Don't allow override of model height with height from NSA object

Deviation from "official" noise demands. Negative is more restrictive,

positive is less restrictive.:

0,0 dB(A)

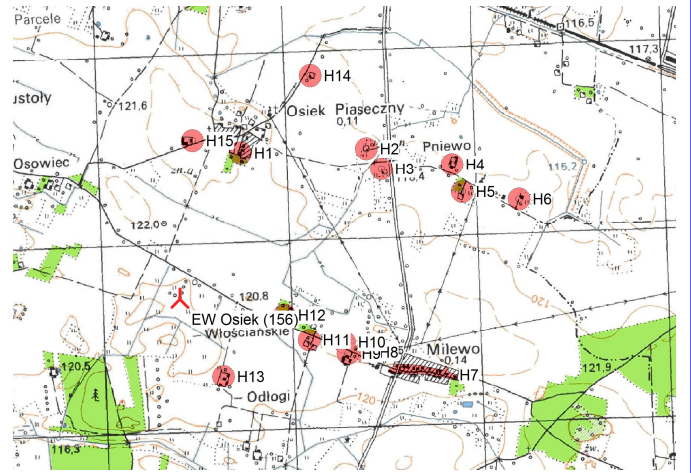

New WTG

Noise sensitive area

WTGs

Polish GK 1992/19-ETRS89				WTG type			Noise data								
East	North	Z	Row data/Description	Valid	Manufact.	Type-generator	Power, rated [kW]	Rotor diameter [m]	Hub height [m]	Creator	Name	Wind speed [m/s]	Status	LwA,ref [dB(A)]	Pure tones
		[m]													
EW Osiek (156)	563 054	547 673	120,0	VESTAS V80-2.0MW 2000 ...	Yes	VESTAS	V80-2.0MW-2 000	2 000	80,0	60,0	EMD	Mode 0	13,0	User value	106,0 0 dB h

h) Generic octave distribution used

Calculation Results

Sound Level

Noise sensitive area		Polish GK 1992/19-ETRS89			Demands		Sound Level		Demands fulfilled ?
No.	Name	East	North	Z	Imission height [m]	Noise [dB(A)]	From WTGs [dB(A)]	Noise	
H1	Noise sensitive point: (1)	563 374	548 452	122,0	4,0	45,0	37,0		Yes
H10	Noise sensitive point: (10)	563 926	547 444	122,5	4,0	45,0	36,3		Yes
H11	Noise sensitive point: (11)	563 738	547 456	122,0	4,0	45,0	38,7		Yes
H12	Noise sensitive point: (12)	563 608	547 589	121,5	4,0	45,0	41,2		Yes
H13	Noise sensitive point: (13)	563 285	547 263	121,2	4,0	45,0	42,9		Yes
H14	Noise sensitive point: (36)	563 744	548 858	118,5	4,0	45,0	31,7		Yes
H15	Noise sensitive point: (37)	563 120	548 516	123,0	4,0	45,0	36,9		Yes
H2	Noise sensitive point: (2)	564 041	548 474	118,0	4,0	45,0	32,5		Yes
H3	Noise sensitive point: (3)	564 121	548 367	118,0	4,0	45,0	32,5		Yes
H4	Noise sensitive point: (4)	564 495	548 390	117,8	4,0	45,0	29,9		Yes
H5	Noise sensitive point: (5)	564 550	548 245	118,0	4,0	45,0	29,9		Yes
H6	Noise sensitive point: (6)	564 850	548 206	118,0	4,0	45,0	28,1		Yes
H7	Noise sensitive area: (7)	564 163	547 302	122,0	4,0	45,0	33,5		Yes
H8	Noise sensitive point: (8)	564 038	547 391	122,5	4,0	45,0	34,9		Yes
H9	Noise sensitive point: (9)	563 944	547 383	122,5	4,0	45,0	35,9		Yes

Distances (m)

WTG	
NSA	EW Osiek (156)
H1	842
H10	902
H11	718
H12	561
H13	471
H14	1372
H15	846
H2	1272
H3	1273

To be continued on next page...

Project:	Description:	Printed/Page
EW Zawidz-Raciaz	Dziółka ewidencyjna 156 obr. Osiek Piaseczny.	2014-02-02 14:30 / 2
	Emitor dzwieku: EW Osiek (156): - wysokosc masztu: 60 m, - moc akustyczna: 106,0 dB (A), - wspolczynnik szorstkosci gruntu G=0 (zasada przezornosci, niezgodnie z PN-ISO 9613-2:2002 Akustyka).	Licensed user: NATURO Piotr Dmochowski ul. Owsiana 1A PL-81-020 Gdynia (+48) 501 552 536 Piotr Dmochowski / piotr@natura.info
	Punkty imisji rownowaznego poziomu dzwieku: - H1: H15.	Calculated: 2014-02-02 14:30/2.8.579

DECIBEL - Main Result

Calculation: Zal. 3.2 Analiza akustyczna: EW Osiek (156) (zasada przezornosci)

...continued from previous page

WTG

NSA	EW Osiek (156)	
H4		1610
H5		1602
H6		1874
H7		1169
H8		1024
H9		936